

Certificate of Compliance

Certificate Number 011907E25861706CA23819
Report Reference E258617, Report 2007 January 12
Issue Date 2007 January 19

Page 1 of 2



Issued to: Goennheimer Elektronik GMBH

Dr-Julius-Leber-Str 2
67433 Neustadt Germany

*This is to certify that
representative samples of*

Purge/Pressurization Controls

Model FS850U followed by .0, .2, or .3, followed by .2, .4, .6, or .8, followed by .0 or .1.

*Have been investigated by Underwriters Laboratories Inc.® in
accordance with the Standard(s) indicated on this Certificate.*


Standard(s) for Safety:

UL 1203, Fourth Edition; NFPA 496, 2003 Edition; UL 913, Sixth Edition;
UL 508, Seventeenth Edition, UL 840, Third Edition.


Additional Information:


Class I, Division 1, Groups B, C and D Hazardous Locations.

Only those products bearing the UL Classification Mark should be considered as being covered by UL's Classification and Follow-Up Service.

The UL Classification Mark includes: UL in a circle symbol:  with the word "CLASSIFIED" (as shown); a control number (may be alphanumeric) assigned by UL; a statement to indicate the extent of UL's evaluation of the product; and, the product category name (product identity) as indicated in the appropriate UL Directory.

Look for the UL Classification Mark on the product

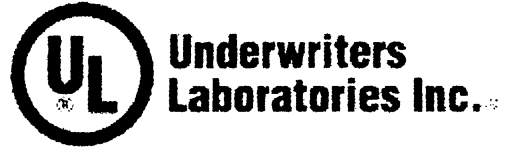
Issued by: 
John N. Chambers/Section Manager
Underwriters Laboratories Inc.

Reviewed by: 
Paul T. Kelly/Operations Manager
Underwriters Laboratories Inc.

Certificate of Compliance

Certificate Number 011907E25861706CA23819
Report Reference E258617, Report 2007 January 12
Issue Date 2007 January 19

Page 2 of 2



This is to verify that representative samples of the product as specified on this certificate were tested according to the current UL requirements.


RATINGS:


Purge controls are rated 110 V ac, 120 V ac, 230 V ac; 2.5 W max; 60 Hz.
Relay contacts are rated 250 V ac, 5 A maximum.

TEMPERATURE CODE/ AMBIENT TEMPERATURE RANGE:

The devices are intended for use in a maximum ambient temperature of 55°C with a T4 temperature code, and 40°C with a T6 temperature code.

This appendix is to be used in conjunction with Certificate of Compliance No. 011907-E258617-06CA23819.

Issued by: 
John N. Chambers/Section Manager
Underwriters Laboratories Inc.

Reviewed by: 
Paul T. Kelly/Operations Manager
Underwriters Laboratories Inc.